



GEN-NVR64-PRO4 Netzwerkvideorekorder für bis zu 64 Kameras

Aufzeichnung / Verwaltung bis zu 64 IP Kameras, bis zu 4 Festplatten (optional), P2P: einfache Fernabfrage



- ◆ Bis zu 64 IP-Kameras mit bis zu 32MP Auflösung
- ◆ Unterstützung von Kennzeichen- und AI-Kameras
- ◆ ONVIF 2.12 kompatibel
- ◆ Unterstützt H.264/H.265 Kompression
- ◆ 4x S-ATA für Festplatten bis 10TB (intern)
- ◆ Einfache Netzwerkanbindung über P2P
- ◆ Fernzugriff über Web-Browser, IOS und Android
- ◆ Zentralensoftware für Windows
- ◆ Lieferumfang: Rekorder, Maus
- ◆ 24x7 Video-Festplatten optional

Abmessungen und Anschlüsse:



System / Aufzeichnung

Prozessor:	Industrial embedded micro-processor
Betriebssystem:	Embedded LINUX
Kameraanzahl:	max. 64 Netzwerkkameras
Unterstützte Auflösung:	max. 32 MegaPixel pro Kamera
Bandbreite für Kameras:	max. 384 Mbit Gesamt
Kompression Video:	H.265+/H.265/H.264+/H.264
Aufzeichnungsarten:	Permanent, Timer, Motion

Anschlüsse /Extern /Intern


HDMI 1 Display:	max.3840x2160, min.1280x720 - max. 64 Kameras
HDMI 2 Display	max.3840x2160, min.1280x720 - max. 64 Kameras
VGA 1,2 Ausgang	identie Darstellung mit HDMI 1,2, 1920x1080 Pixel
Schnittstellen	2x USB 3.0, 1x USB 2.0, RS485, RS232, e-Sata
Alarmkontakte:	16 Eingänge / 6 Ausgänge
Festplatten (intern):	4x S-ATA bis zu 20TB je nach Temperatur

Netzwerk und Fernzugriff

Ethernet:	2x RJ-45 Port (10/100/1000Mbps)
Remote Zugriff:	iPhone, iPad, Android, kostenlose Zentralensoftware Smart PSS (Windows)
Maximale User:	max. 64 User/Kanäle

Spannungsversorgung / PoE

Spannungsversorgung:	100-240Vac
PoE Support:	NEIN

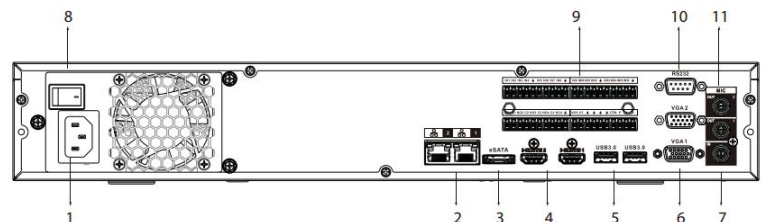

- | | |
|------------------------|---------------------|
| 1. Stromanschluss | 7. MIC IN - RCA |
| 2. Netzwerkbuchse 2x | 8. Ein-/Ausschalter |
| 3. eSATA Anschluss | 9. Alarm IN/OUT |
| 4. HDMI Anschluss - 2x | 10. RS-232 |
| 5. USB Port - 2x | 11. Mic Out, RCA |
| 6. VGA Anschluss - 2x | |

Technical Specification

System	
Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web, Local GUI

AI	
AI by Recorder	Face detection; face recognition; perimeter protection; SMD Plus
AI by Camera	Face detection; face recognition; video metadata (human, motor vehicles, and non-motor vehicles); perimeter protection; SMD Plus; stereo analysis; crowd distribution; people counting; ANPR; vehicle density; heat map
AcuPick AI by Camera + Recorder	Max. 16-channel, 1 combined event per channel/s

Perimeter Protection	
Perimeter Performance AI by Recorder (Number of Channels)	4 channels, 10 IVS rules for each channel
Perimeter Performance of AI by Camera (Number of Channels)	16 channels

Face Detection	
Face Attributes	Gender; age group; glasses; expressions; face mask; beard
Face Detection Performance of AI by Recorder (Number of Channels)	2 channels (up to 12 face images/s each channel)
Face Detection Performance of AI by Camera (Number of Channels)	16 channels

Face Recognition	
Face Database Capacity	Up to 20 face databases with 20,000 images, with a total capacity of 2.5 G. Name, gender, birthday, address, credential type, credential No., countries & regions and state can be added to each face image.
Face Recognition Performance of AI by Recorder (Number of Channels)	1. 16-channel FD (by camera) + FR (by recorder), image stream: 16 face images/s 2. 2-channel FD (by camera) + FR (by recorder), video stream: 12 face images/s
Face Recognition Performance of AI by Camera (Number of Channels)	16 channels

SMD Plus	
SMD Plus by Recorder	8 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change
SMD Plus by Camera	16 channels

Video Metadata	
Metadata Performance of AI by Camera (Number of Channels)	8 channels
Human Attributes	Top color, top type, bottom color, bottom type, hat, bag, age, gender and umbrella
Motor Vehicle Attributes	License plate, plate color, vehicle body, vehicle model, vehicle logo, calling, seatbelt, vehicle interior, vehicle registration location.

Non-motor Vehicle Attributes	Vehicle model, vehicle color, number of persons, helmet.
------------------------------	--

Vehicle License Plate Comparison

ANPR by Camera (Number of Channels)	8 channels
License Plate Database Capacity	1. Create up to 20,000 plate numbers. 2. Blocklist and allowlist

Audio and Video	
Access Channel	64
Network Bandwidth	AI disabled: 384 Mbps incoming, 384 Mbps recording and 384 Mbps outgoing AI enabled: 200 Mbps incoming, 200 Mbps recording and 200 Mbps outgoing
Resolution	32 MP; 24 MP; 16 MP; 12 MP; 8 MP; 5 MP; 4 MP; 1080p; 720p; D1; CIF; QCIF
Decoding Capability	AI disabled: 2-channel 32 MP@25 fps; 2-channel 24 MP@25 fps; 4-channel 16 MP@30 fps; 5-channel 12 MP@30 fps; 8-channel 8 MP@30 fps; 12-channel 5 MP@30 fps; 16-channel 4 MP@30 fps; 32-channel 1080p@30 fps AI enabled: 1-channel 32 MP@25 fps; 1-channel 24 MP@25 fps; 2-channel 16 MP@30 fps; 4-channel 12 MP@30 fps; 6-channel 8 MP@30 fps; 8-channel 5 MP@30 fps; 12-channel 4 MP@30 fps; 24-channel 1080p@30 fps
Video Output	2 VGA, 2 HDMI VGA:1920 × 1080, 1280 × 1024, 1280 × 720 HDMI:3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 Heterogeneous video source output for HDMI1 and HDMI2 Simultaneous video source output for VGA1 and HDMI1 Simultaneous video source output for VGA2 and HDMI2
Multi-screen Display	Main screen: 1/4/8/9/16/25/36/64 Sub screen: 1/4/8/9/16
Third-party Camera Access	ONVIF; Panasonic; Sony; Axis; Arecont; Pelco; Canon; Samsung

Compression Standard	
Video Compression	Smart H.265+; H.265; Smart H.264+; H.264; MJPEG
Audio Compression	G.711a; G.711u; PCM; G726

Network	
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UDP; SNMP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; PPPoE; FTP; DDNS; Alarm Server; IP Search (Supports Dahua IP camera, DVR, NVS, etc.); Multicast; P2P; Auto Registration; iSCSI
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 22.12 (Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome;IE;Safari;Edge;Firefox
Network Mode	Multi-address mode, load balance, fault tolerance and other network port binding modes

Recording Playback	
Multi-channel Playback	Up to 16 channels
Record Mode	General, motion detection; intelligent; alarm; POS
Backup Method	USB device and network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection)

Storage

Disk Group	YES
------------	-----

Alarm

General Alarm	Motion detection; privacy masking; local alarm
Anomaly Alarm	Camera offline; storage error; disk full; IP conflict; MAC conflict; login lock; abnormal behavior of fan; cybersecurity exception
Intelligent Alarm	Face detection; perimeter protection; face recognition; video metadata (human, motor vehicles, and non-motor vehicles); SMD Plus; stereo analysis; crowd distribution; people counting; ANPR; vehicle density; heat map
Alarm Linkage	Record; snapshot (panoramic); local alarm output; IPC external alarm output; access controller; audio; buzzer; log, preset; email

Port

Audio Input	1-channel RCA
Audio Output	2-channel RCA
Alarm Input	16 channels
Alarm Output	6 channels (1-channel 12 V 1 A output)
HDD Interface	4 SATA ports, each disk can contain up to 20 TB. This limit varies depending on the environment temperature.
eSATA	1
RS-232	1
RS-485	1 (half-duplex serial communication)
USB	3(1 front USB 2.0 port, 2 rear USB 3.0 ports)
HDMI	2
VGA	2
Network Port	2 (10/100/1000 Mbps Ethernet port, RJ-45)

General

Power Supply	100–240 VAC, 50-60 Hz
Power Consumption	Total output of NVR is ≤ 13 W (without HDD)
Net Weight	4.74 kg (10.45 lb)
Gross Weight	6.11 kg (13.47 lb)
Product Dimensions	440.0 mm × 415.1 mm × 70.0 mm (17.32" × 16.34" × 2.76") (W × D × H)
Packaging Dimensions	530.0 mm × 500.0 mm × 210.0 mm (20.87" × 19.69" × 8.27")(W × D × H)
Operating Temperature	–10 °C to +55 °C (14 °F to +131 °F)
Storage Temperature	–20 °C to +60 °C (–4 °F to +140 °F)
Operating Humidity	10%–93% (RH)
Installation	Rack or desktop
Certifications	FCC: 47 CFR FCC Part15, SubpartB, Class A CE-EMC: EN 55032:2015+A1:2020; EN IEC 61000-3-2:2019+A1:2021; EN 61000-3-3:2013+A1:2019+A2:2021; EN 55035:2017+A11:2020; EN 50130-4:2011+A1:2014 CE-LVD: EN 62368-1:2014